











flexible. variable. measurable.

Bigbag Handling





Experts in Handling, Blending and Cleaning Technology

SERVOLIFT GmbH Albert-Einstein-Straße 9 77656 Offenburg Germany

T. +49 (0) 781 6100 0 F. +49 (0) 781 6100 400

info@servolift.de www.servolift.de

▶ Bigbag Lifter

Bigbags are more and more used in production areas with a high hygiene standard. SERVOLIFT offers a ideal solution for filling and discharging of bulk material. Our new designed twin-lifter enables the handling of bigbags within a minimum of space. Due to the integrated weighing device, batch materials can be exactly discharged, filled and dosed.














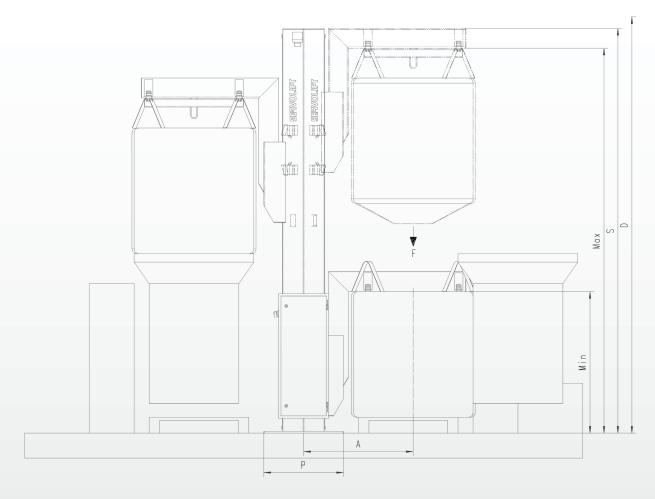

Index	Description	Measurement	Example
F	Load capacity	given by customer 1 kg - 1800 kg	1000 kg
D	Ceiling height	given by customer	4500 mm
	Big Bag	given by customer	
	Slewing angle	given by customer max 270°	no slewing function
S	Column heigh	D - 125 mm	4053 mm
Max	max. lift	depends on load capacity and overhang	3950 mm
Min	min. lift	given by customer	1550 mm
Α	Overhang column axis - middle of big bag	depends on load capacity and big bag size	1100 mm
Р	Base plate (*) in mm		800 x 800 mm