



Handling



Dispensing



Sieving



Blending




Container



Cleaning

Automatic Discharging

with continuously adjustment valve opening

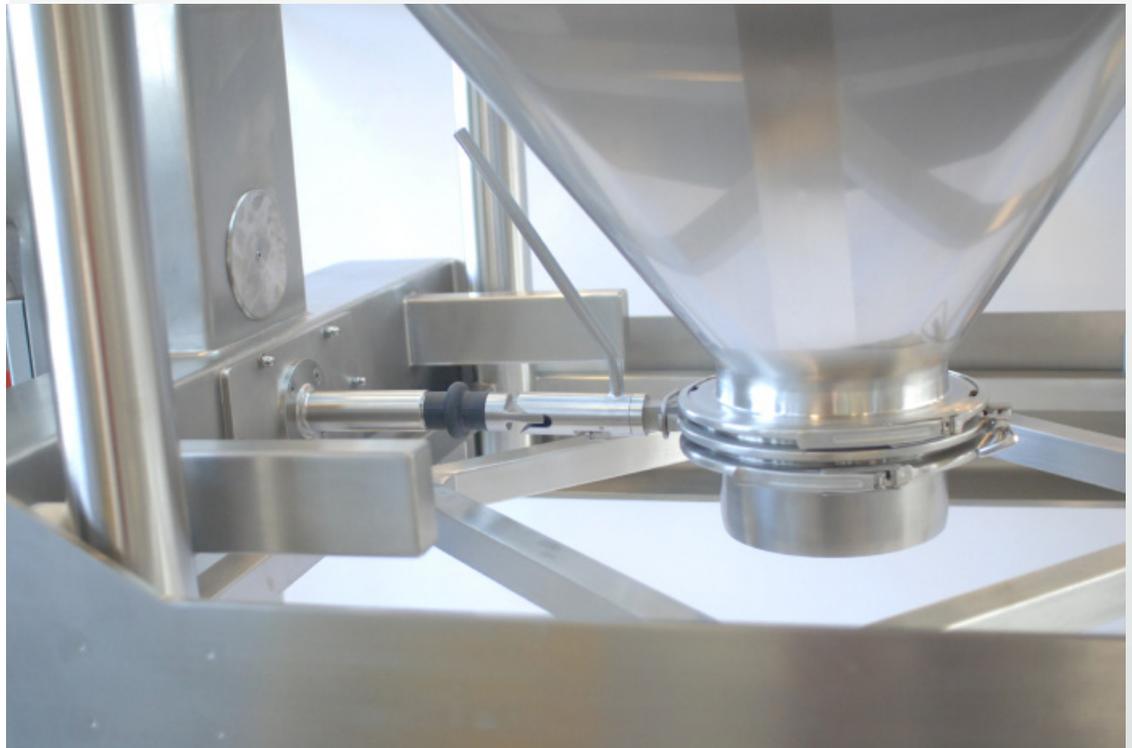

SERVOLIFT
lifetime solutions

Your specialist for
complete handling-, blending-
and cleaning technologies


► Valve opening mechanism

Manual opening of butterfly valves with lifted load, is often not possible without using aids such as mobile platforms. For this purpose, SERVOLIFT has added there portfolio by a controlled opening and closing device for container valves. The new mechanism allows continuous adjusting of interim positions as well as detection of the end positions (valve open/close).

SERVOLIFT GmbH
Albert-Einstein-Straße 9
77656 Offenburg Germany

T. +49 (0) 781 6100 0
F. +49 (0) 781 6100 400

info@servolift.de
www.servolift.de

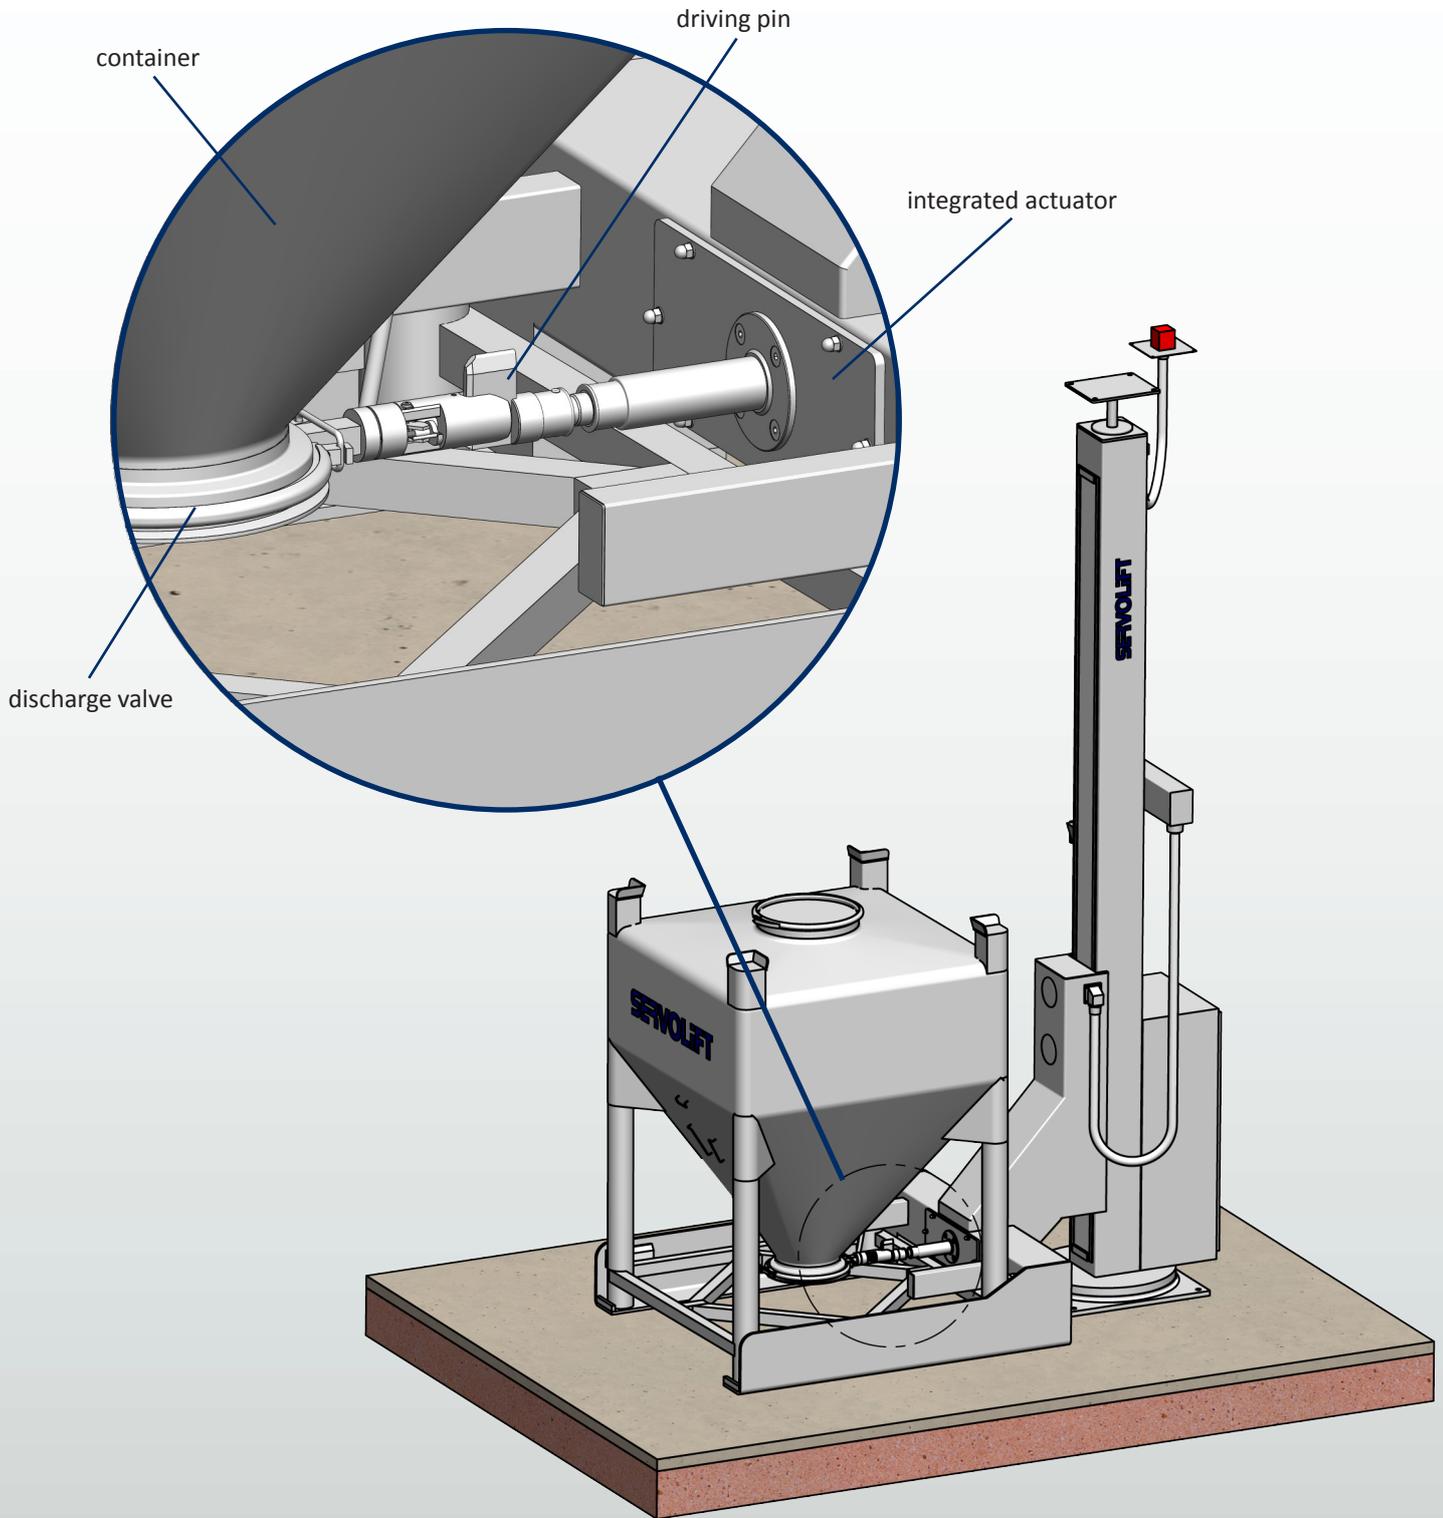

The device is dismountable, cleanable and therefore convenient for GMP-conform environment. This system can be added to existing SERVOLIFT systems.

control:
opening angle:
interim position:
applicability:

pneumatically / electrically
between 0° and 90°
variable
SERVOLIFT - lifter and container